

TYRE CATALOGUE

AGRICULTURE TYRES



Company Introduction



TOP 9
No. 9 of Top 75 Global Tyre Manufacturers

SINCE 1958
Established in Year 1958

30,000 EMPLOYEES
Support from Over 30,000 Employees

200 MARKETS
Trust from Customers Across More than 200 Markets

Zhongce Rubber Group Co., Ltd (ZC-Rubber) is a global tyre company based in Hangzhou, China and was founded in 1958. Over our more than 60 years of history, we experienced continuous growth in quality and reputation to become the Top 10 tyre manufacturer worldwide today.

Our engineers with our international R&D team focus on constant technological development and innovation spending millions of US dollars in research and development each year and upgrading our production and testing facilities. The ET Industrial Brain in the production process promises our smart production and guarantee tyres with high quality, safety, and value with maximum efficiency.

We have formed an extensive global service network of about 1,200 distributors with 250,000 sales locations in 160 countries. Our subsidiaries in Thailand, Germany, Brazil, and the United States serve customers without any difference in time and language. We are dedicated to better support our suppliers, distributors, and customers through a one-stop service.

Safe and Value are always the key of our company. We take pride in the superior quality of our tyre products and the first-rate services. We are still endeavoring to become one of the most respected tyre manufacturers globally and craft a better future with all partners and friends.

Most Advanced Equipment

Best Raw Material

Leanest Management

Latest Technology

Least Energy Consumption

Most Suitable Products

COMPANY MISSION

WE ARE COMMITTED TO ADVANCING TOWARDS FUTURE MOBILITY

COMPANY VISION

TO BE A GLOBAL LEADING TIRE MANUFACTURER



China Compulsory Certification



US DOT Certification



European E-MARK Certification



SNI Certification of Indonesia



BIS Certification of India



INMETRO Certification of Brazil


ZC-Rubber America Inc.

ZC-Rubber Mexico
(Under Planning)


ZC-Rubber Brasil Co. Ltd.

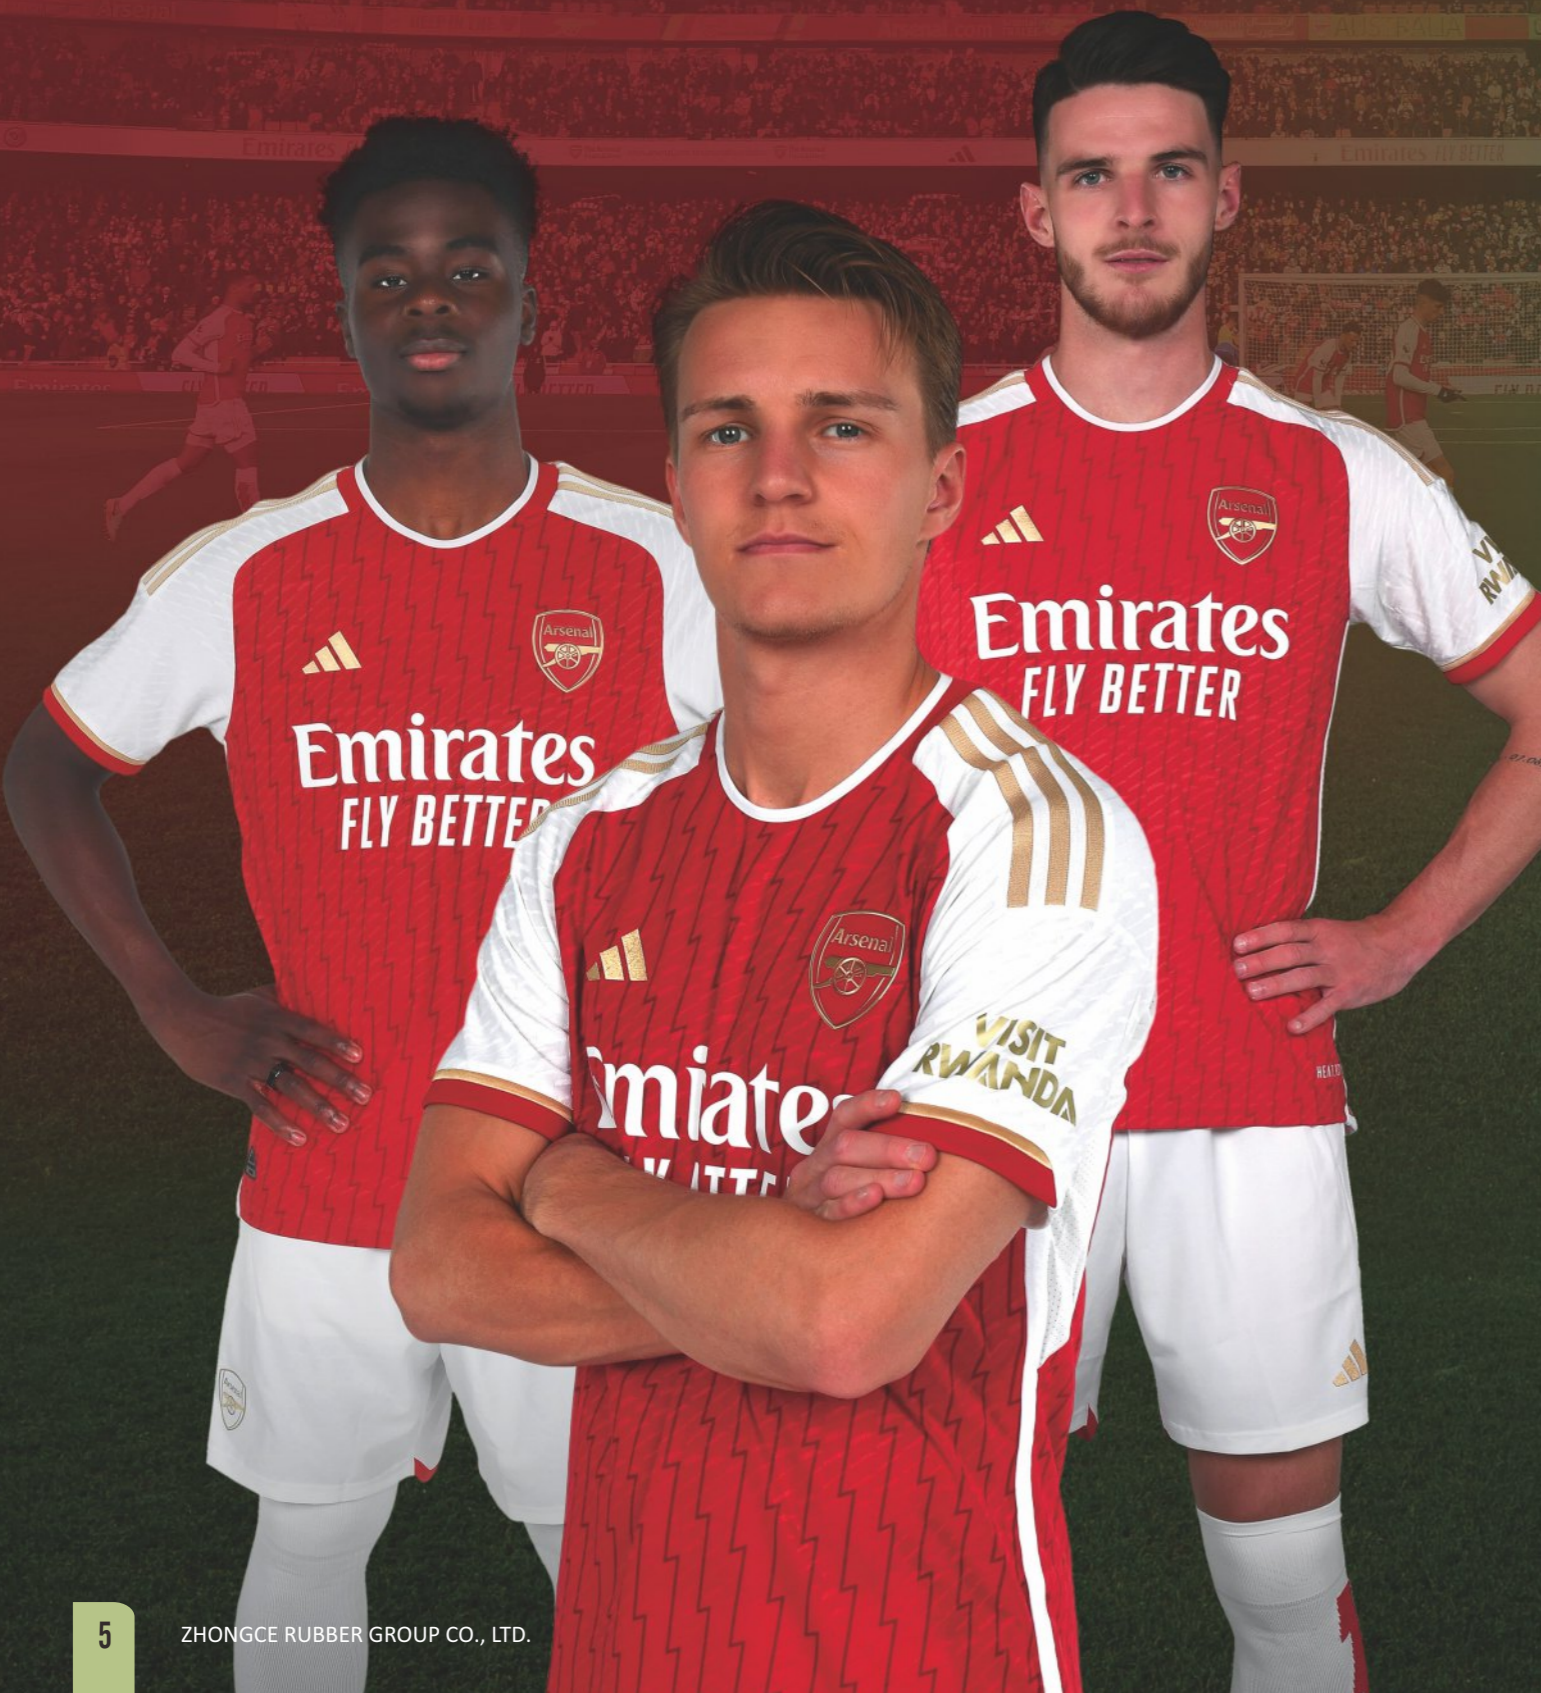

ZC-Rubber Europe Technical Center
ZC-Rubber Europe GmbH

ZC-Rubber Thailand Co. Ltd.


ZC-Rubber Indonesia
(Under Construction)


ZC-Rubber HQ
ZC-Rubber Tianjin
ZC-Rubber Chaoyang
ZC-Rubber Jiande
ZC-Rubber Qingquan
ZC-Rubber Yonggu
ZC-Rubber Anji
ZC-Rubber Jintan
ZC-Rubber Recycling
Tech. Co. Ltd.
Hangzhou ZC-Rubber
Auto Space Co. Ltd.

Strategic Cooperation



OE CUSTOMERS



KEY ACCOUNTS



KEY SUPPLIERS





AR20

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
12.4-24	R-2	8	16	67.0	W11	1192	315	1415	230	TL
14.9-24	R-2	8	15	73.0	W13	1340	378	1760	180	TL
18.4-30	R-2	10	17	80.0	W16L	1597	467	2815	180	TL



LS25

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
23.1-26	LS-2	16	17	55.0	DW20A	1560	587	4450	240	TL
30.5L-32	LS-2	26	16	55.0	DW27	1847	775	7100	280	TL



R8018

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
4.00-14		B/4		8.0	3.00D	590	110	270	340	TT
4.50-14		D/8		9.0	3.00D	602	122	580	520	TT
5.50-16		E/10		9.0	4.00E	685	150	800	500	TT



M8088

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
4.50-14		D/8		9.0	3.00D	602	122	580	520	TT



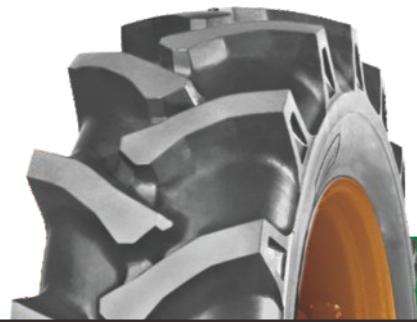
L8058

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
4.00-12		C/6		7.0	3.00D	535	112	205	240	TT
4.00-14		B/4		8.0	3.00D	590	110	270	340	TT
4.00-14		C/6		8.0	3.00D	590	110	315	450	TT
5.00-14		E/10		10.0	3.00D	620	130	600	500	TT



CB538

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
8.3-24	R-1	C/6	18	30.0	W7	995	210	810	240	TT
8.3-24	R-1	D/8	18	30.0	W7	995	210	950	300	TT
9.5-24	R-1	D/8	19	33.0	W8	1050	240	1110	280	TT
11.2-24	R-1	B/4	17	35.0	W10	1105	285	750	120	TT
11.2-24	R-1	C/6	17	35.0	W10	1105	285	950	180	TT
11.2-24	R-1	D/8	17	35.0	W10	1105	285	1150	240	TT
12.4-24	R-1	B/4	17	36.0	W11	1160	315	850	110	TT
12.4-24	R-1	C/6	17	36.0	W11	1160	315	1090	170	TT
12.4-24	R-1	D/8	17	36.0	W11	1160	315	1285	220	TT
14.9-24	R-1	B/4	17	38.0	W13	1265	378	1210	100	TT/TL
14.9-24	R-1	C/6	17	38.0	W13	1265	378	1360	140	TT/TL
14.9-24	R-1	D/8	17	38.0	W13	1265	378	1600	180	TT/TL
16.9-24	R-1	C/6	19	39.0	W15L	1335	430	1725	130	TT/TL
11.2-28	R-1	B/4	18	35.0	W10	1205	285	800	120	TT
12.4-28	R-1	T/6	19	36.0	W11	1260	315	1150	170	TT
14.9-28	R-1	C/6	18	38.0	W13	1365	378	1610	140	TT
14.9-28	R-1	D/8	18	38.0	W13	1365	378	1880	180	TT
14.9-28	R-1	E/10	18	38.0	W13	1365	378	2120	230	TT
16.9-28	R-1	C/6	19	39.0	W15L	1435	430	1840	130	TT
16.9-28	R-1	D/8	19	39.0	W15L	1435	430	2175	170	TT
14.9-30	R-1	D/8	21	38.0	W13	1415	378	1940	180	TT
14.9-30	R-1	E/10	21	38.0	W13	1415	378	2190	230	TT
16.9-30	R-1	C/6	20	39.0	W15L	1485	430	1900	130	TT
16.9-30	R-1	D/8	20	39.0	W15L	1485	430	2245	170	TT
16.9-30	R-1	F/12	20	39.0	W15L	1485	430	2730	240	TT
18.4-30	R-1	C/6	19	38.0	W16L	1550	467	2120	110	TT
18.4-30	R-1	D/8	19	38.0	W16L	1550	467	2415	140	TT
18.4-30	R-1	F/12	19	38.0	W16L	1550	467	3180	230	TT
11-32	R-1	C/6	20	36.0	W10	1450	296	1080	160	TT
24.5-32	R-1	F/12		43.0	DW21	1805	622	4000	170	TL
24.5-32	R-1	G/14		43.0	DW21	1805	622	4375	190	TL
30.5L-32	R-1	F/12		43.0	DW27	1845	775	4745	140	TL
30.5L-32	R-1	H/16		43.0	DW27	1845	775	5370	170	TL
16.9-34	R-1	D/8	23	39.0	W15L	1585	430	2380	170	TT
16.9-34	R-1	E/10	23	39.0	W15L	1585	430	2605	200	TT
18.4-34	R-1	C/6		40.0	W16L	1655	467	2250	110	TT
18.4-34	R-1	F/12		40.0	W16L	1655	467	3375	230	TT
11.2-38	R-1	B/4	22	30.0	W10	1465	285	950	120	TT/TL
12-38	R-1	D/8	22	36.0	W11	1514	315	1600	220	TT
12.4-38	R-1	B/4	22	36.0	W11	1565	315	1165	110	TT
12.4-38	R-1	D/8	22	36.0	W11	1565	315	1750	230	TT
13.6-38	R-1	C/6	23	36.0	W12	1565	345	1660	160	TT
13.6-38	R-1	E/10	23	36.0	W12	1565	345	2215	250	TT
14.9-38	R-1	C/6	23	38.0	W13	1615	378	1870	140	TT
14.9-38	R-1	D/8	23	38.0	W13	1615	378	2180	180	TT
15.5-38	R-1	B/4	22	37.5	W14L	1570	395	1280	100	TT
15.5-38	R-1	C/6	22	37.5	W14L	1570	395	1765	140	TT
16.9-38	R-1	C/6	28	39.0	W15L	1685	430	2130	130	TT
16.9-38	R-1	D/8	28	39.0	W15L	1685	430	2520	170	TT
18.4-38	R-1	C/6	23	40.0	W16L	1755	467	2380	110	TT
18.4-38	R-1	D/8	23	40.0	W16L	1755	467	2715	140	TT
20.8-38	R-1	D/8	22	40.0	W18L	1835	528	3090	130	TT
20.8-38	R-1	F/12	22	40.0	W18L	1835	528	4000	200	TT
24.5-32	R-1	F/12	22	43.0	DW21A	1805	620	4000	178	TL
24.5-32	R-1	G/14	22	43.0	DW21A	1805	620	4375	190	TL
30.5L-32	R-1	F/12	22	43.0	DW21A	1845	775	4250	140	TL
30.5L-32	R-1	H/16	22	43.0	DW21A	1845	775	5000	180	TL
230/95-48	R-1	H/16		32.0	W7	1656	229	2000	320	TL



CB558

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
4.00-8		B/4		15.0	3.00D	435	112	150	240	TT
4.00-10		B/4		15.0	3.00D	485	112	185	240	TT
5.00-12		B/4+		20.0	4.00D	590	145	280	200	TT
5.00-12		B/4+		21.0	4.00E	590	145	280	200	TT
6.00-12		C/6		22.0	4.50E	640	165	405	250	TT
6.00-12		D/8		22.0	4.50E	640	165	520	330	TT
6.00-14		C/6		24.0	4.50E	690	165	450	250	TT
6.00-16		C/6		24.0	4.50E	745	165	495	250	TT
6.50-16		C/6		24.0	5.00F	765	180	565	250	TT
7.50-20	R-1	D/8	18	26.0	5.50F	910	205	900	280	TT
9.5-20	R-1	D/8	16	31.0	W8	950	240	955	280	TT
8.3-24	R-1	C/6	17	30.0	W7	995	210	810	240	TT
9.5-24	R-1	D/8	18	31.0	W8	1050	240	1110	280	TT
11.2-24	R-1	D/8	16	33.0	W10	1105	285	1225	240	TT
12.4-24	R-1	D/8	17	36.0	W11	1160	315	1415	230	TT
14.9-24	R-1	D/8	18	38.0	W13	1265	378	1760	180	TT
14.9-26	R-1	E/10	19	38.0	W13	1315	378	2055	230	TT
12.4-28	R-1	C/6	20	32.0	W11	1260	315	1275	170	TT
12.4-28	R-1	D/8	20	32.0	W11	1260	315	1510	230	TT
12.4-28	R-1	F/12	20	32.0	W11	1260	315	1930	350	TT
13.6-28	R-1	F/12	20	43.0	W12	1310	345	2085	290	TT
14.9-28	R-1	D/8	20	38.0	W13	1365	378	1880	180	TT
16.9-30	R-1	D/8	20	41.0	W15L	1485	430	2245	170	TT
16.9-30	R-1	F/12	20	41.0	W15L	1485	430	2730	240	TT
18.4-30	R-1	F/12	20	43.0	W16L	1550	467	3180	230	TT
30.5L-32	R-1	I/18	22	43.0	DW27A	1845	775	6000	210	TT
16.9-34	R-1	D/8	23	41.0	W15L	1585	430	2380	170	TT
16.9-34	R-1	E/10	23	41.0	W15L	1585	430	2605	200	TT
18.4-34	R-1	F/12	21	43.0	W16L	1655	467	3375	230	TT
18.4-38	R-1	E/10	23	43.0	W16L	1755	467	3165	180	TT
18.4-38	R-1	F/12	23	43.0	W16L	1755	467	3575	230	TT
20.8-38	R-1	E/10	22	43.0	W18L	1835	528	3475	160	TT



CB558+

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
30.5L-32	R-1	18	22	43	DW27A	1845	775	6000	210	TL



CB522/CB522A

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
5.00-12		4		15.0	4.00E	590	145	280	200	TT
6.50-12 (CB522A)		E/10		27.0	4.50E	665	175	610	350	TT
6.00-129 (1714LUG)		C/6		24.0	4.50E	640	165	405	250	TT
6.00-12 (2014LUG)		C/6		22.0	4.50E	640	165	405	250	TT



CB523

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
5.00-12		B/4		24.0	4.00E	590	145	280	200	TT



CB558M

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
6.00-14		C/6		24.0	4.50E	690	165	450	250	TT



CB530

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
6.00-12	R-1	C/6	14	24.0	4.50E	640	165	405	250	TT
6.00-12	R-1	C/6	17	24.0	4.50E	640	165	405	250	TT



CB527/CB527A

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
6.00-12		C/6		22.0	4.50E	640	165	405	250	TT
7.50-16		D/8		24.0	5.50F	810	205	890	390	TT
6.00-12 (CB527A)		C/6		22.0	4.50E	640	165	405	250	TT



CB540

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
8.3-20	PR-1	C/6	14	70.0	W7	950	210	970	270	TT
8.3-20	PR-1	D/8	14	70.0	W7	950	210	1130	350	TT
8.3-24	PR-1	C/6	15	70.0	W7	1050	210	1135	270	TT
8.3-24	PR-1	D/8	15	70.0	W7	1050	210	1275	330	TT
9.5-24	PR-1	C/6	15	80.0	W8	1150	240	1315	240	TT
9.5-24	PR-1	D/8	15	80.0	W8	1150	240	1475	290	TT
11.2-24	PR-1	C/6	16	82.0	W10	1205	285	1465	210	TT
14.9-24	PR-1	E/10		90.0	W15L	1410	410	1990	230	TT
18.4-24	PR-1	E/10	17	90.0	W16L	1505	467	2300	180	TT
14.9-26	PR-1	D/8	18	90.0	W13	1460	378	1760	180	TT
12.4-28	PR-1	D/8	18	85.0	W11	1315	315	1785	200	TT
14.9-28	PR-1	D/8	19	90.0	W13	1510	378	1880	180	TT
16.9-30	PR-1	E/10		95.0	W15L	1585	430	2455	200	TT
18.4-30	PR-1	E/10	18							TT
11-32	PR-1	C/6		85.0	W10	1460	305	1080	160	TT
16.9-34	PR-1	E/10		95.0	W15L	1685	430	3385	220	TT
18.4-34	PR-1	E/10		90.0	W16L	1755	467	2990	180	TT
13.6-38	PR-1	D/8		95.0	W12	1710	345	2780	250	TT
18.4-38	PR-1	E/12	21	90.0	W16L	1855	467	3575	230	TT



CB590

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
6.50-16	PR-1	C/6		60.0	5.00F	830	165	565	250	TT
7.50-16	PR-1	C/6		63.0	5.50F	890	195	750	300	TT



CR510

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
10.00-15		D/8	20	9.0	8LB	855	276	1330	310	TT



CR520

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
4.00-14		B/4		10.0	3.00D	590	110	270	340	TT
4.00-16		B/4		12.0	3.00D	620	112	435	275	TT
5.00-15		C/6		10.0	4J	665	140	465	420	TT
5.50-16		C/6		14.0	4.00E	710	150	525	370	TT
6.00-16		C/6		14.0	4.00E	740	160	560	340	TT
6.00-16		D/8		14.0	4.00E	740	160	675	450	TT
6.50-16		C/6		15.0	4.50E	760	175	615	310	TT
7.50-16		C/6		20.0	5.50F	810	205	745	280	TT



CR532

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
6.00-16		C/6		11.5	4.00E	740	160	560	340	TT



CR542

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
7.50-16		D/8		20.0	5.50F	810	205	870	370	TT



CR524

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
4.00-12		B/4		7.0	3.00D	535	112	205	240	TT



CR550M

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
6.00-16		D/8		19.0	4.00E	740	160	675	450	TT



CR525

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
4.00-8		C/6		7.0	3.00D	415	112	305	390	TT



CR850

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
4.00-8		C/6		7.0	3.00D	415	112	305	390	TT
4.00-14		B/4		8.0	3.00D	590	110	270	340	TT
4.50-14		D/8		8.5	3.00D	602	122	580	520	TT



CL526

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
4.00-8		B/4		7.0	3.00D	415	112	225	275	TT
4.00-8		C/6		7.0	3.00D	415	112	305	390	TT
5.00-14		D/8		8.0	3.00D	620	130	500	420	TT
5.00-14		E/10		8.0	3.00D	620	130	600	500	TT
5.00-16		D/8		7.5	4.00E	655	130	550	420	TT



CM521

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
4.50-14		D/8		8.5	3.00D	602	122	580	520	TT
4.50-16		C/6		10.5	3.00D	655	122	615	360	TT
4.50-16		D/8		10.5	3.00D	655	122	650	460	TT
5.00-16		D/8		10.5	4.00E	655	130	550	420	TT
5.00-16		E/10		10.5	4.00E	655	130	650	500	TT
5.50-16		E/10		10.0	4.00E	685	150	800	500	TT



CL827

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
5.00-16		D/8		7.5	4.00E	655	130	550	420	TT



CL518

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
4.00-8		B/4		7.0	3.00D	415	112	225	275	TT



CL855

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
5.50-16		E/10		10.0	4.00E	685	150	800	500	TT



CL877

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
4.50-16		D/8		10.0	3.00D	655	122	680	460	TT
5.00-16		E/10		10.5	4.00E	655	130	650	500	TT
5.50-16		E/10		10.0	4.00E	685	150	800	500	TT



R-4

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
21L-24	R-4	F/12		27.5	DW18	1400	533	2410	190	TL



EL23

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
16.9-28	R-4	F/12		31.0	W15L	1410	430	3550	260	TL
18.4-26	R-4	F/12		30.0	DW16	1425	467	4000	250	TL



EL53

Size	TRA Code	Ply Rating	LUG #	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure		TT/TL
								(kg)	(kPa)	
10.5/80-18	I-3	E/10		26.0	9	885	274	1935	370	TL
12.5/80-18	I-3	F/12		26.0	9	985	308	2625	370	TL
12.5/80-18	I-3	G/14		26.0	9	985	308	2910	430	TL



ZHONGCE RUBBER GROUP CO., LTD.



zc-rubber.com



facebook.com/zcrubber



twitter.com/zc_rubber



linkedin.com/company/zcrubber